Timothy Otholt · Field Cabling Work

timotholt@gmail.com · (408) 406-1832
timotholt.com · linkedin.com/in/timotholt

Ventel Telephone · Contractor for AT&T · Southern California · 2023–2025

Upgraded fiber-optic network routers (**Fujitsu HSN8300NA**) at **22 AT&T cell sites** without interrupting service. Racked and installed units, pulled cable, ran fiber jumpers up to 100 ft, and wired **–48 VDC** power from the site DC plant.


RACK INSTALL



Before. Existing Ciena 3930 rack ahead of the upgrade.




After. Fujitsu HSN8300NA installed under the Ciena 3930 and DC fuse panel; fiber dressed and bundled.

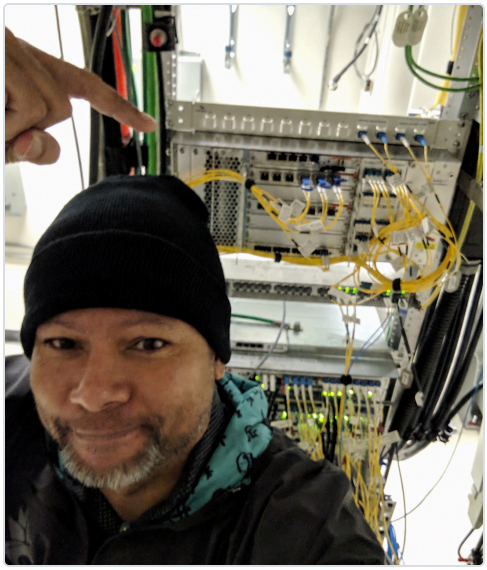


Another site. Indoor AT&T equipment room, with another finished 8300 install.

FIBER JUMPERS · ROUTED, DRESSED, LABELED

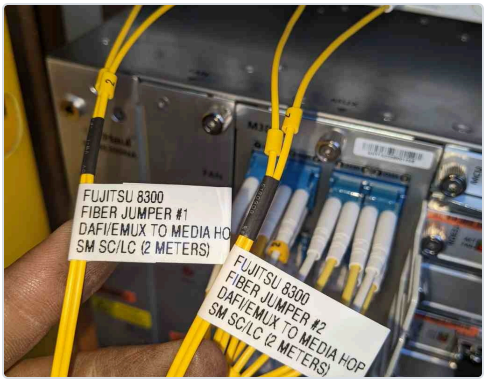

Each jumper labeled by system, number, route, connector type and length.

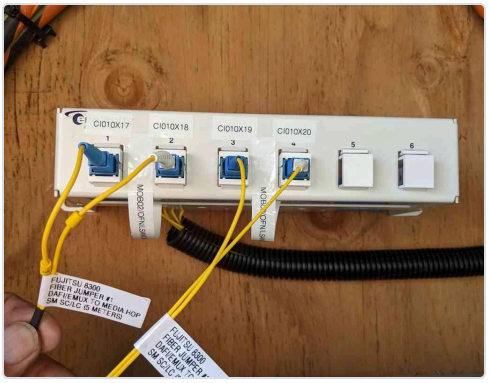


Labeled jumpers patched into the media hand-off panel.




Mule tape pull line for a 35 ft cable run, tagged DAFI/EMUX to LTE.

–48 VDC POWER & GROUNDING

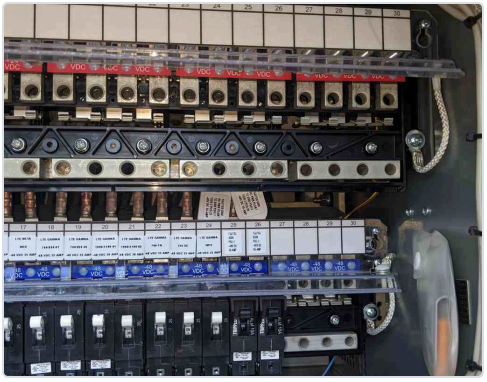

DC plant: new feeds landed on breaker positions 25 and 26.

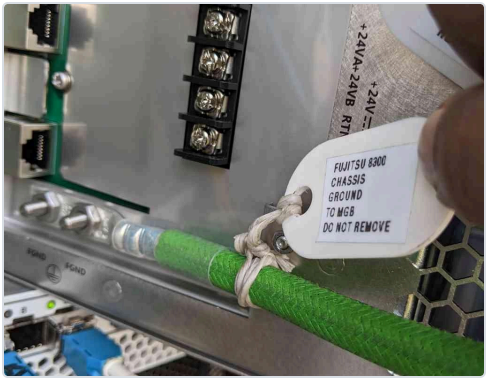

#6 AWG chassis ground run from the 8300 to the master ground bar.



Both feeds checked with a meter before power-up.